

## Angle of injection impact on the combustion process in a compression-ignition engine

P. Łagowski<sup>1</sup>, D. Kurczyński<sup>1</sup>, G. Wcisło<sup>2</sup>, B. Pracuch<sup>3</sup>, V. Tomyuk<sup>4</sup>

<sup>1</sup> *Kielce University of Technology*

Department of Automotive Vehicles and Transportation, Poland

Phone: 0048 41 3424332 *e-mail: kdarek@tu.kielce.pl*

<sup>2</sup>Faculty of Production Engineering and Power Technologies. University of Agriculture in Krakow, Poland

Phone. 0048 513-157-977, *e-mail: grzegorz.wcislo@ur.krakow.pl*

<sup>3</sup> Malopolskie Centre for Renewable Energy Sources "BioEnergia", Poland  
*e-mail: gwcislo@bioenergia.com.pl*

<sup>4</sup> Lviv National Agrarian University; Department of Automobiles and Tractors, Ukraine  
*e-mail: vtomyuk@ukr.net*

*Received April 14.2017: accepted June 22.2017*

**Summary.** The article presents the impact of hydrocarbon fuel angle of injection on heat emission characteristics in a compression - ignition AD3.152 engine. The angle of injection has a significant impact on the primary engine operating parameters and combustion process indicators, which include the proportion of combustion which occurs according to kinetic and diffusion models, heat emission rate and the combustion process duration. The characteristics describing emission of a relative heat quantity were determined on the basis of an analysis of actual, indicator diagrams averaged over 100 runs, under the assumption that the combustion process ends by the time the exhaust valve opens. During the test, the engine operated according to an external speed characteristic. Tests were carried out for three fuel angles of injection: 13, 17 and 21 crankshaft rotation degrees.

**Key words:** angle of injection, Diesel engine, emission, physical and chemical properties of the fuel.

### INTRODUCTION

Ever steeper requirements faced by modern internal combustion engines are forcing manufacturers to use complex fuel cleaning systems as well as systems which improve the engine performance characteristics such as power, torque or a reduction in fuel consumption [8, 6, 7]. The shape of an indicator diagram has a direct impact on the values of those parameters. The diagram in question depicts the end result of thermodynamic, thermochemical and hydro-aerodynamic processes as well as heat exchange which occur in a cylinder of a piston internal combustion engine [1, 4, 5]. It is the primary quantitative and qualitative source of information on these processes and indicated engine performance parameters. Furthermore, it can be used to determine the heat

emission characteristics during the combustion process, the equilibrium content of the working medium which changes in accordance with the crankshaft rotation angle function, "pressure increase in cylinders" of a working engine expressed as  $dp/da$ , etc.

The shape of the curve mostly depends on the progress and quality of fuel dispersion during the injection process as well as the quantity and aerodynamic properties of air in the engine cylinder, etc. These parameters are key when it comes to the quality of the created and combusted combustible mixture. A well organised combustion process impacts the conversion quality of chemical energy stored in the fuel into mechanical energy, fuel consumption, concentrations of harmful substances in the emissions and engine noise. The primary engine fuel combustion process characteristics are characteristics pertaining to the relative heat emission quantity. The form of the aforementioned characteristics is traced out on the basis of an analysis of actual indicator diagrams, which depends both on the accuracy of the diagram itself as well as the analysis method [2,3].


The relative heat quantity emission during the combustion process characteristic is determined on the basis of an indicator diagram analysis using the 1st law of thermodynamics [1]. Determination of the heat quantity emission during the combustion process characteristics requires the following to be known: a precisely recorded and plotted pressure change in a cylinder curve, instant cylinder volume, knowledge of the quantity, composition and properties of the working medium and a reliable model for the heat exchange between the working medium and cylinder walls. Preparing an experimentally

taken indicator diagram for analysis has to entail a smoothing out of averaged pressure cycles in a cylinder and take into account precise and reliable determination of the piston position at TDC.

#### TEST SUBJECT AND TEST STAND

Experimental tests were carried out on an engine test stand which comprised an AD3.152 UR engine (test

subject), brake, control and measurement cabinet, used to control the stand and obtain readings of the measured engine operation and brake parameters. The stand was equipped with a system for measurement of rapidly changing values such as: cylinder pressure, fuel pressure in the injection hose and injector needle travel. Figure 1 shows a diagram of the test stand.

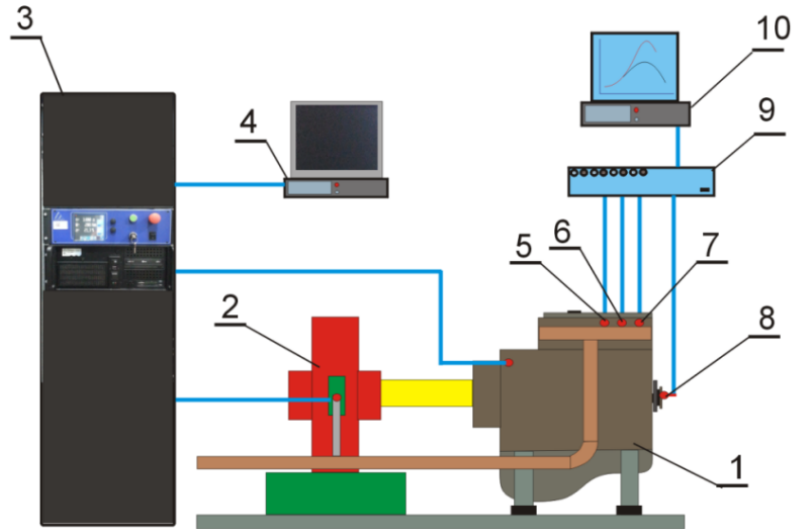


**Fig. 1.** Test stand, where: 1 - Perkins AD3.152UR engine; 2 - eddy current brake; 3 - measurement cabinet with test stand control system; 4 - computer used to control test facility parameters and to archive test results; 5 - engine cylinder pressure sensor; 6 - injector needle travel sensor; 7 - pressure sensor in the injection hose; 8 - engine crankshaft rotation angle encoder; 9 - module for measuring rapidly changing values, 10 - computer used to archive rapidly changing value readings

**Table 2.** Perkins 1104D-44TA compression-ignition engine specification

Parameter	Unit	Value
Cylinder system	-	inline
Number of cylinders	-	4
Type of injection	-	direct
Fuel system	-	Delphi DP310 rotary fuel injection pump
Maximum power	kW	75
Rated speed	rpm	2200
Maximum torque	Nm	416.0
Maximum torque rotational speed	rpm	1400
Displacement	m <sup>3</sup>	4.4 · 10 <sup>-3</sup>
Compression	-	18.2
Air inlet system	-	turbocharged, aftercooled

Figure 2 depicts a flow chart of the engine indication system. The system for measuring rapidly changing values comprise four measurement paths: combustion chamber pressure measurement path, injection hose pressure measurement path, injection needle travel measurement path, crankshaft rotation angle decoder path. The combustion chamber pressure measurement path comprised a liquid cooled piezo-quartz sensor, connecting leads and load amplifier. Injection hose pressure measurement path elements include a piezo-quartz sensor, connecting leads and load amplifier. The injector needle travel measurement path comprises: a linear variable differential transformer, connecting leads and an amplifier with a carrier wave. The values

measured using the aforementioned sensors were recorded as a crankshaft rotation angle function. This task of the metering system was performed by the crankshaft rotation angle measurement path. This path included a crankshaft rotation angle transmitter and an electronics module, which initiated given measurement commencement impulses and generated a series of impulses ensuring readings every, defined engine crankshaft rotation angle range. The load amplifiers enhanced and processed signals generated by the sensors into voltage signals. Voltage signals were processed by an analogue - digital converter to into a digital format saved to the computer's memory.

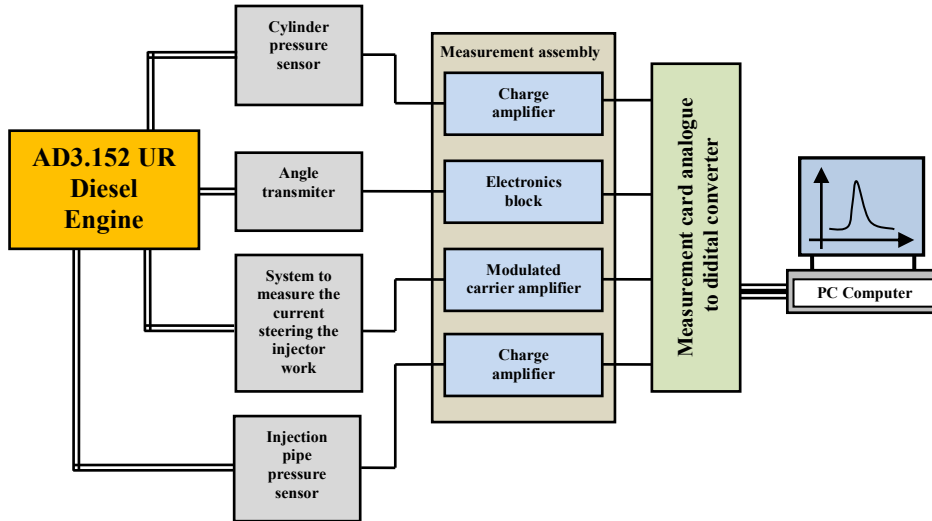

**Fig. 2.** Flow chart of the piston internal combustion compression - ignition engine rapidly changing parameters measurement system used for the experimental tests

**OBJECTIVE AND SCOPE OF THE TESTS**

The objective of the tests was to determine the impact of the angle of injection on the combustion process, evaluated on the basis of primary heat emission parameter characteristics. To that end, actual indicator diagrams were recorded over time as well as values required to calculate the primary engine operation parameters. During the test the engine operated according to an external speed characteristic. The variable parameter in the form of fuel

angle of injection was 13, 17 and 21 crankshaft rotation degrees respectively. Based on the actual indicator diagrams identified during the tests as well as the primary engine operation parameters, heat emission characteristics during the combustion process were determined and then analysed. During the tests the engine was fuelled by diesel. See table 2 for its primary physical and chemical properties.

**Table 2.** Primary physical and chemical properties of the fuel used to power the engine during testing

Parameter	Diesel
Cetane number	51.4
Calorific value, [MJ/kg]	43.2
Density at 15°C, [g/cm <sup>3</sup> ],	0.8354
Kinematic viscosity, [mm <sup>2</sup> /s] (~40°C)	2.64
Surface tension, [N/m] (20°C)	3.64 · 10 <sup>-2</sup>
Ignition temperature, [°C]	63
Cloud point, [°C]	-17
Cold filter plugging point, [°C]	-23
Average, elementary fuel composition, [%]	
- C	87.2
- H	12.7
- O	0
S sulphur content, [mg/kg]	9
Water content, [mg/kg]	43.8
Solid contaminants content, [mg/kg]	5
Coking residue in a 10% distillation residue, [(m/m)]	0.01
Copper strip corrosion test, [class]	1

**Heat emission characteristics determination algorithm.** Characteristics for the emitted heat during the combustion process were drawn up based on actual indicator diagrams. These characteristics were determined using the amount of fuel combusted during a cycle and the quantity of the working medium required to perform a cycle and excess air coefficient. Characteristics for the relative amount of emitted heat during the combustion process were drawn up on the basis of INDY-2 software developed at the Kielce University of Technology's Heat Engine Department [1]. Using the software in question, heat emission characteristics calculations are performed under the assumption that the combustion process terminated by the time the exhaust valve opens and that the total value of the relative heat amount emitted during the combustion process is equal to one [9].

Once the consumed fuel dosage during a cycle and working medium for that have been determined together with the excess air coefficient, the characteristic for the relative amount of emitted heat is determined on the basis of the first law of thermodynamic equation in the following format:

$$g_c \cdot W_u dx - \delta Q_{sc} - \delta Q_{nied} - \delta Q_{dys} = dU + pdV \quad (1)$$

where:

$$\delta Q_{sc} + \delta Q_{nied} + \delta Q_{dys} = \delta Q_{str} \quad (2)$$

or in an integral format:

$$g_c \cdot W_u - Q_{\sum str} = \Delta U + \int_{V_{ps}}^{V_i} pdV \quad (3)$$

where:  $Q_{\sum str}$  - total heat loss transferred to cylinder walls and losses caused by thermolysis, imperfect and incomplete combustion,  $\delta Q_{sc}$  - heat loss transferred to cylinder walls,  $\delta Q_{nied}$  - loss caused by imperfect and incomplete combustion,  $\delta Q_{dys}$  - losses caused by thermolysis,  $dU$  - internal energy change,  $pdV$  - work,  $W_u$  - fuel net calorific value,  $g_c$  - fuel quantity combusted during one cycle. That quantity was calculated using the following formula:

$$g_c = \frac{G_h}{30 \cdot n \cdot c} ; \text{kg/cycle} \quad (4)$$

where:  $G_h$  - hourly fuel consumption,  $n$  - engine crankshaft rotational speed,  $c$  - number of cylinders.

With knowledge as to the elementary fuel composition,  $M_o$  theoretical quantity of air required to combust 1 kg of fuel was calculated, and then with knowledge of  $\lambda$  excess air coefficient, the amount of  $M_1$  kmol working medium for a single engine cycle was calculated using the following formula:

$$M_1 = g_c \lambda M_o ; \text{kmol/cycle} \quad (5)$$

Dividing equation (1) by  $g_c W_u$  we obtain a formula which can be used to determine the indicated net heat emission amount characteristics for the combustion process:

$$dx - \delta x_{str} = dx_i \quad (6)$$

where:

$$dx_i = \frac{dU + pdV}{g_c \cdot W_u} \quad (7)$$

The equation can be written in the following format:

$$x - x_{str} = x_i \quad (8)$$

where:

$$x_i = \frac{U_i - U_{ps} + \int_{V_{aps}}^{V_i} pdV}{g_c \cdot W_u} \quad (9)$$

where:  $x$  - relative amount of heat emitted during the combustion process,  $x_{str}$  - relative working medium heat loss during the heat combustion process,  $x_i$  - indicated heat emission characteristic,  $V_i$  - current value at  $i^{\text{th}}$  point in the graph,  $V_{aps}$  - cylinder volume at the point corresponding to the start of combustion.

The maximum  $x_{i\max}$  value is also the  $\xi$  utilisation coefficient of heat emitted during the combustion process.

In formula (9),  $U_{ps}$  is the working medium internal energy at the start of the combustion process, and  $U_i$  is the instant working medium internal energy, calculated using:

$$U_i = M_i \bar{c}_{vi} T_i \quad (10)$$

where:  $T_i$  - current temperature  $M_i$  - current working medium kmol in the engine cylinder during the combustion process, calculated using:

$$M_i = \beta_x M_{ps}; \text{ where: } \beta_x = 1 + \frac{\beta_o - 1}{1 + \gamma} \cdot x \quad (11)$$

In that equation  $\beta_x$  - is the instant value of mole change coefficient.

The current value of mole specific heat capacity of the working medium during the combustion process in equation (10) is determined assuming a linear relationship with temperature that is using:

$$\bar{c}_{vi} = a_i + b_i \cdot T_i, \quad (12)$$

The current values of specific heat capacities of the working medium during the combustion process is calculated using:  $a_i = a_{spr}(1-x) + x a_\gamma$  ;

$$b_i = b_{spr}(1-x) + x b_\gamma, \quad (13)$$

where:  $T_i$  - is the current temperature value calculated using state-space representation equations. When calculating the mean temperature as well as the work performed by the working medium, pressure values determined using interpolation functions are used.

The values of specific heat capacities coefficients of the working medium during the compression phase is calculated using:


$$a_{spr} = \frac{a_\lambda + \gamma a_\gamma}{1 + \gamma} \quad i \quad b_{spr} = \frac{b_\lambda + \gamma b_\gamma}{1 + \gamma} \quad (14)$$

where:  $a_\lambda$  and  $b_\lambda$  - specific heat capacity coefficient for air,  $\gamma$  - exhaust residue coefficient,  $a_\lambda$  and  $b_\lambda$  - mole specific heat capacities of exhaust gasses generated by the combustion process.

With knowledge of  $x_i$  characteristic of the relative net heat quantity emitted during the combustion process, the heat emission rate during combustion is calculated:


$$\dot{x}_i = \frac{x_i - x_{i-1}}{\alpha_i - \alpha_{i-1}} \quad (15)$$

Figure 3 depicts a textbook run of the relative heat quantity emission rate during the combustion process characteristic with the share of combustion which proceeds according to the kinetic combustion model and share of combustion which proceeds according to the diffusion model identified.

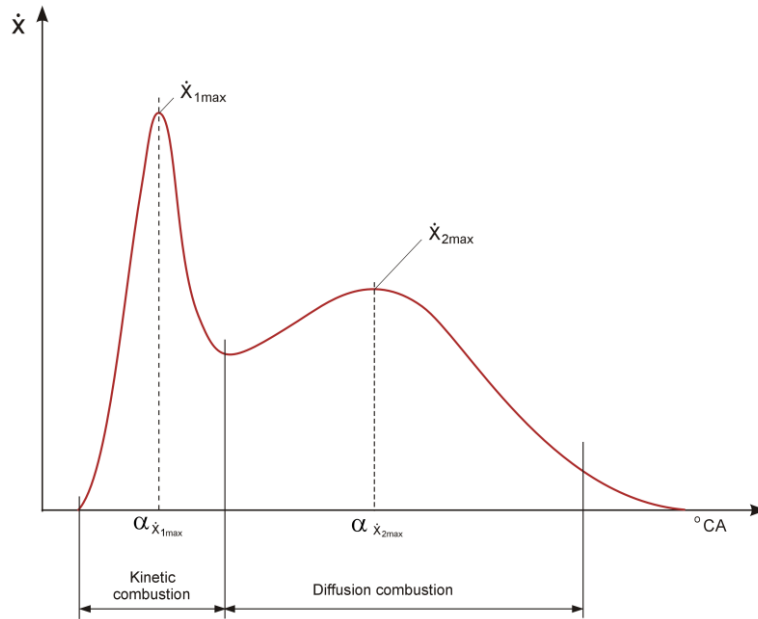

**Fig. 3.** Example relative heat emission rates during a combustion process with the  $x_{kin}$  kinetic combustion phase and  $x_{dys}$  diffusion phase identified together with the phases of their occurrence  $\alpha_{\dot{x}_{1max}}$  and  $\alpha_{\dot{x}_{2max}}$

Figure 4 depicts a graphical illustration of the presented methodology for determining the heat emission characteristic during a combustion process.

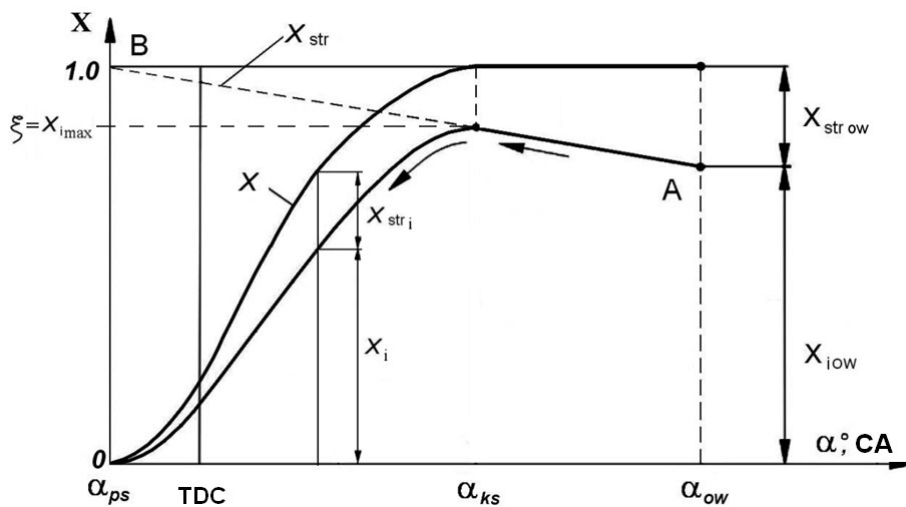


**Fig. 4.** A graphical illustration of the method for determining characteristic  $x$ ,  $x_i$  and  $x_{str}$ :  $\alpha_{ps}$  - start of the combustion process,  $\alpha_{ks}$  - end of the combustion process,  $\alpha_{ow}$  - engine exhaust valve begins to open

TEST RESULTS

The self-ignition delay period was determined by defining the start of the combustion process as the point where the curve of that indicated graph separates from the compression process curve (without the occurrence of the combustion process) drawn up for politropic exponent  $n_1$ , whereas the start of fuel injection was defined on the basis of  $h_i$  injector needle travel.


Figure 5 depicts the  $\alpha_{os}$  injection angle for three angles of injection  $\alpha_{ww} = 13, 17$  and  $21$  crankshaft rotation degrees before the top dead centre TDC position of the piston and subject to engine operation according to an external speed characteristic. As can be seen on the diagram, a reduction of the angle of injection to  $13$  results in a decreased self-ignition delay, whereas increasing  $\alpha_{ww}$  to  $21$  crankshaft rotation degrees results in a larger self-ignition delay relative to the nominal angle of injection of  $\alpha_{ww} = 17$  crankshaft rotation degrees.

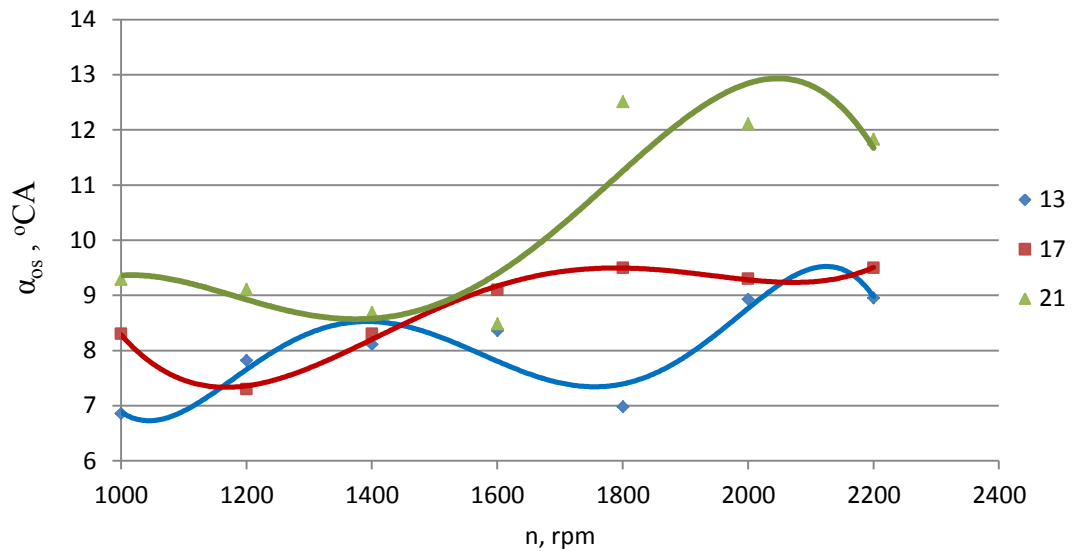

**Fig. 5.** Change to  $\alpha_{os}$  angle of self-ignition delay under the engine operating according to an external speed characteristic for three fuel angles of injection  $\alpha_{wv} = 13, 17$  and  $21$  crankshaft rotation degrees

Figure 6 below depicts example graphs of heat emission characteristics for the of AD3.152UR engine fuelled by diesel under engine operation according to an external speed characteristic, for engine crankshaft

rotational speeds  $n = 1400$  and  $2000$  rpm and factory set angle of injection  $\alpha_{wv} = 17$  crankshaft rotation degrees.

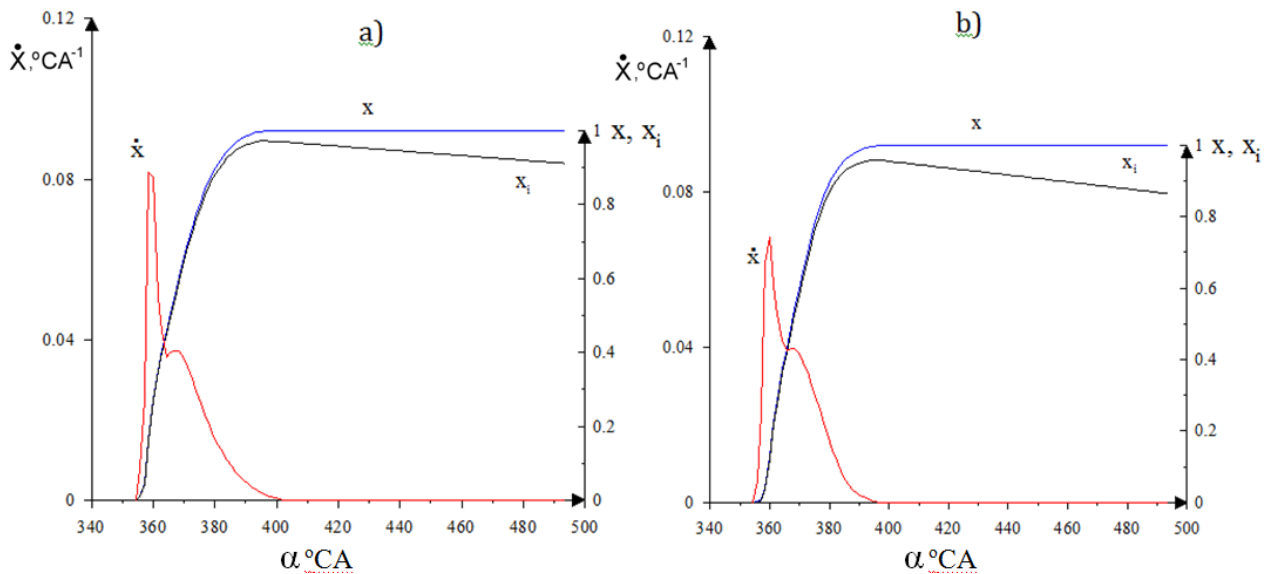

**Fig. 6.** Characteristics for relative heat emission during a combustion process  $x(\alpha)$ ,  $x_i(\alpha)$  and  $\dot{x}(\alpha)$  under the engine operating at the factory set angle of injection  $\alpha_{wv} = 17$  crankshaft rotation degrees and operating according to an external speed characteristic with a)  $n=1400$  rpm and b)  $n=2000$  rpm and fuelled by diesel

Table 3 presents the primary combustion process parameters for the AD3.152UR engine operating according to a speed characteristic, for three angles of injection and powered by diesel. The table presents parameters such as  $N_e$  - engine brake horsepower,  $\alpha_{os}$  - self-ignition delay,  $x_{kin}$  - kinetic model combustion proportion,  $x_{dyf}$  - diffusion model combustion proportion,


$\dot{x}_{1max}$  - first flame speed,  $\dot{x}_{2max}$  - second flame speed,  $\alpha_{\dot{x}_{1max}}$  - first flame speed engine crankshaft rotation angle,  $\alpha_{\dot{x}_{2max}}$  - second flame speed engine crankshaft rotation angle,  $x_{str}$  - relative heat losses.

**Table 3.** Combustion process parameters in an AD3.152 UR engine operating according to an external speed characteristic for three fuel angles of injection  $\alpha_{ww} = 13, 17$  and  $21$  crankshaft rotation degrees fuelled by diesel.


Lp.	n	$\alpha_{ww}$	$N_e$	$\alpha_{os}$	$x_{kin}$	$x_{dyf}$	$\dot{x}_{1max}$	$\dot{x}_{2max}$	$\alpha \dot{x}_{1max}$	$\alpha \dot{x}_{2max}$	$x_{str}$
	rpm	°CA	kW	°CA	-	-	(°CA) <sup>-1</sup>	(°CA) <sup>-1</sup>	°CA	°CA	-
1	1000	13	16,02	6,86	0,299	0,701	0,083	0,039	354,37	363,89	0,133
		17	16,50	8,3	0,496	0,504	0,127	0,031	355,78	367,03	0,116
		21	15,62	9,29	0,424	0,576	0,122	0,028	351,56	365,62	0,214
2	1200	13	19,72	7,82	0,311	0,689	0,08	0,041	355,78	364,53	0,132
		17	19,93	7,3	0,501	0,499	0,111	0,034	357,20	365,55	0,117
		21	19,12	9,11	0,453	0,547	0,105	0,028	354,37	365,62	0,197
3	1400	13	23,15	8,11	0,325	0,675	0,077	0,041	357,18	365,62	0,134
		17	23,40	8,3	0,487	0,513	0,099	0,036	357,17	367,03	0,138
		21	22,13	8,6	0,447	0,553	0,098	0,03	355,78	365,62	0,186
4	1600	13	25,96	8,36	0,395	0,605	0,070	0,042	358,59	367,22	0,153
		17	26,58	9,1	0,443	0,557	0,096	0,041	358,38	366,00	0,103
		21	25,16	8,48	0,476	0,524	0,095	0,034	355,78	367,22	0,222
5	1800	13	28,83	6,98	0,385	0,615	0,060	0,045	360,00	368,73	0,148
		17	29,53	9,5	0,496	0,504	0,083	0,039	360,00	371,25	0,117
		21	27,35	12,51	0,483	0,517	0,08	0,037	357,18	367,42	0,228
6	2000	13	30,37	8,93	0,256	0,744	0,053	0,047	361,40	368,43	0,141
		17	32,39	9,3	0,431	0,569	0,068	0,04	360,00	367,03	0,135
		21	29,55	12,11	0,437	0,563	0,067	0,039	358,59	365,62	0,218
7	2200	13	28,83	8,95	0,236	0,764	0,048	0,045	362,81	371,25	0,131
		17	26,78	9,5	0,299	0,701	0,052	0,044	360,00	369,84	0,195
		21	26,47	11,83	0,267	0,733	0,054	0,042	360,00	368,43	0,217

Figures 7 to 9 depict the primary combustion process parameters such as the proportion of kinetic model ( $x_{kin}$ ) and diffusion model ( $x_{dyf}$ ) combustion, value of first and


second flame speed ( $\dot{x}_{1max}$  and  $\dot{x}_{2max}$ ) in an engine operating under an external speed characteristic for three angles of injection.

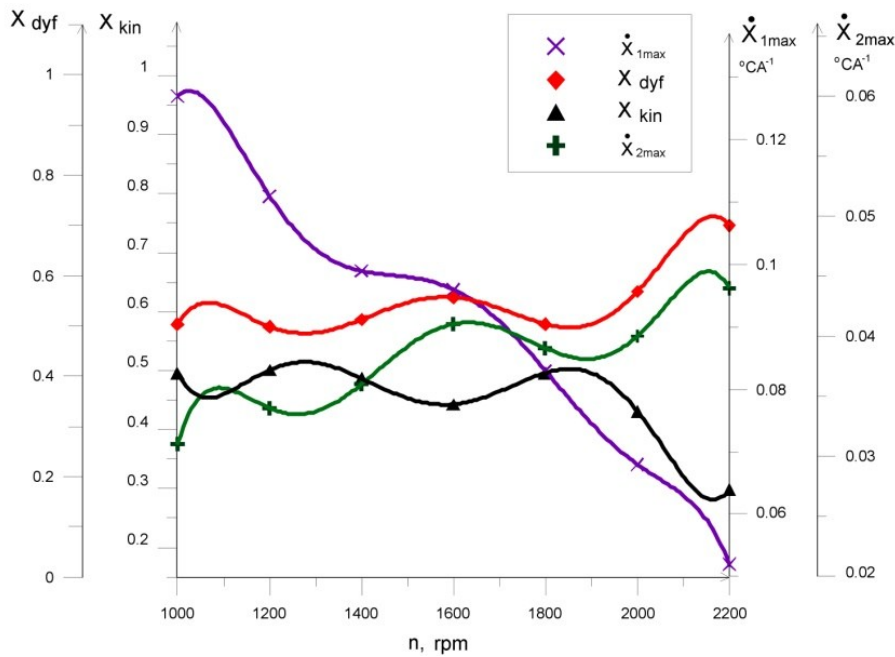

**Fig. 7.** Combustion process parameters for engine operation according to an external speed characteristic and angle of injection  $\alpha_{ww} = 13$  crankshaft rotation degrees, where:  $x_{kin}$  – proportion of kinetic model combustion,  $x_{dyf}$  – proportion of diffusion model combustion,  $\dot{x}_{1max}$  and  $\dot{x}_{2max}$  – first and second maximum heat emission rate

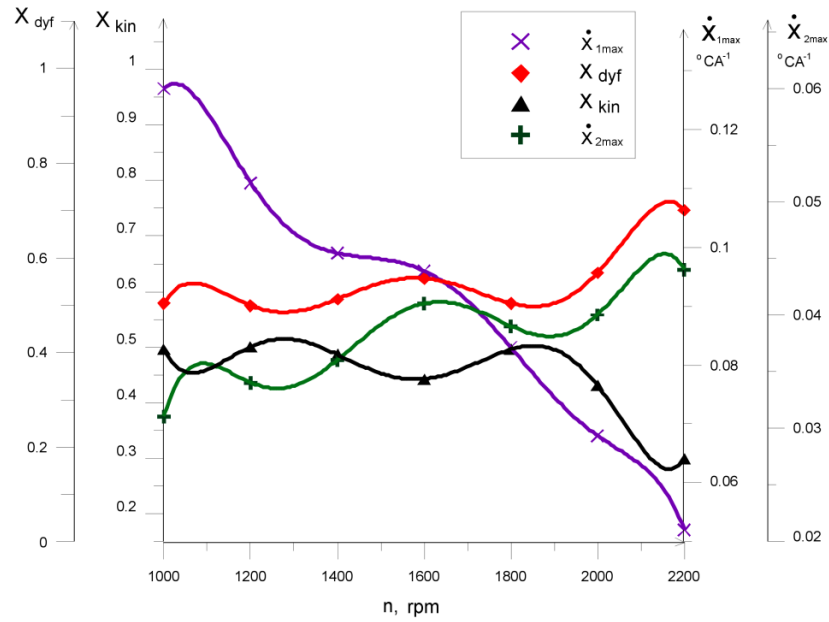

**Fig. 8.** Combustion process parameters for engine operation according to an external speed characteristic and angle of injection  $\alpha_{ww} = 17$  crankshaft rotation degrees, where:  $x_{kin}$  – proportion of kinetic model combustion,  $x_{dyf}$  – proportion of diffusion model combustion,  $\dot{x}_{1max}$  and  $\dot{x}_{2max}$  – first and second maximum heat emission rate

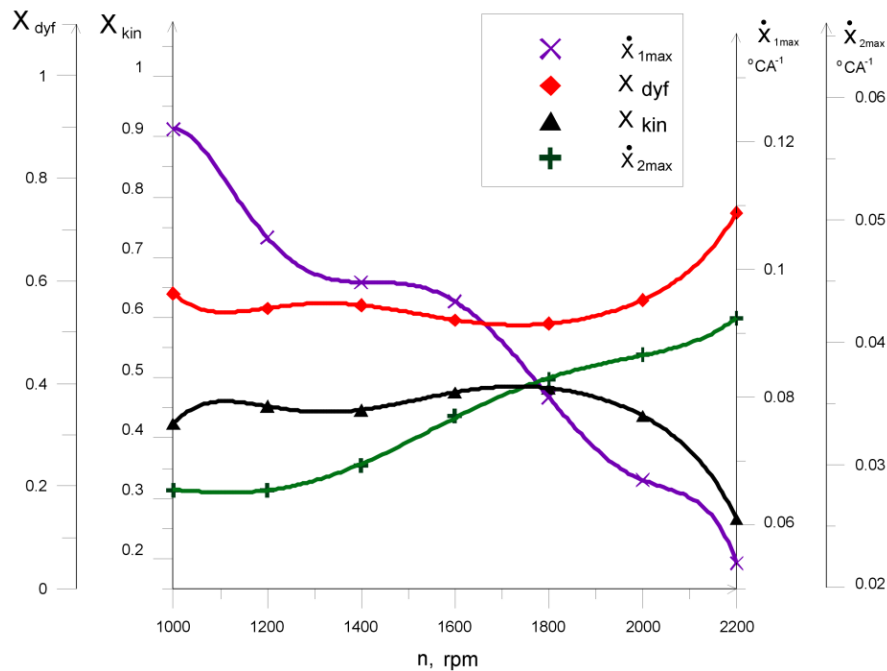

**Fig. 9.** Combustion process parameters for engine operation according to an external speed characteristic and angle of injection  $\alpha_{ww} = 21$  crankshaft rotation degrees, where:  $x_{kin}$  – proportion of kinetic model combustion,  $x_{dyf}$  – proportion of diffusion model combustion,  $\dot{x}_{1max}$  and  $\dot{x}_{2max}$  – first and second maximum heat emission rate

## SUMMARY

One of the primary engine fuel combustion process characteristics is the characteristic pertaining to the relative heat emission quantity. The conducted analysis of measurement results and calculations demonstrated a clear impact of the fuel angle of injection on the primary characteristic heat emission characteristics quantities. Increasing the angle of injection resulted in a clear

increase in the proportion of kinetic model combustion and a reduction to the diffusion model combustion. It also results in increased heat losses to combustion chamber walls. A change in the angle of injection has a slight impact on the maximum heat emission rates and the phases of their occurrence.



## REFERENCES

1. **Ambrozik A. 2010.** Analysis of the work cycles of four-stroke internal combustion engines. Wydawnictwo Politechniki Świętokrzyska, Kielce. (in Poland).
2. **Ambrozik A., Ambrozik T., Łagowski P. 2008.** Approximation of the real indicator diagram with sticky functions. Journals of the Institute of Vehicles, Nr 2(69). (in Poland).
3. **Łagowski P. 2010.** Methodology of determination and assessment of diagnostic values of the indicator diagram of the self-ignition engine. PhD thesis, Politechnika Świętokrzyska, Kielce. (in Poland).
4. **Ambrozik A., Kurczyński D., Łagowski P. 2005.** Heat release characteristics in AD3.152 engine fuelled with hydrocarbon and biogenous fuels. First International Congress on Combustion Engines, PTNSS KONGRES – 2005, The Development of Combustion Engines, Bielsko-Biała/Szczyrk.
5. **Ambrozik A., Kruczyński S., Orliński P. 2007.** Evaluation of the beginning of fuel injection on the process of heat generation in the compression ignition engine, Zeszyty Naukowe IP 3 (66) / 2007, Wyd. Warsaw University of Technology, Warsaw. pp. 99-106, ISSN 1642-347X. (in Poland).
6. **Hyungmin Kim, Jeaduk Ryu, Kihyung Lee. 2007.** A Study on the Characteristics of Spray and combustion in a HCCI engine according to various Injection Angles and Timings. Journal of Mechanical Science and Technology, Vol. 21, No. 1, pp. 133 – 140.
7. **Lotko W., Górski K., Longwic R. 2002.** Journal of KONES Internal Combustion Engines, No. 1-2 ISSN 1231 - 4005.
8. **Mysłowski J., Mysłowski J. 2008.** An attempt to improve the economic indicators of a turbocharged engine. Journal of KONES Internal Combustion Engines, Vol. 15, No. 3. (in Poland).
9. **Ambrozik A., Danileczyk W., Kruczyński S. 2005.** Energy balance for three - way catalytic reactor. Czasopismo: Teka Komisji Motoryzacji i Energetyki Rolnictwa PAN. Zeszyt: 5, pp. 5-14.

#### WPLYW KĄTA WYPRZEDZENIA WTRYSKU PALIWA NA PROCES SPALANIA W SILNIKU Z ZAPŁONEM SAMOCZYNNYM

**Streszczenie.** W artykule przedstawiono wpływ kąta wyprzedzenia wtrysku paliwa węglowodorowego na charakterystyki wydzielania ciepła w silniku o zapłonie samoczynnym AD3.152. Kąt wyprzedzenia wtrysku istotnie wpływa na podstawowe parametry pracy silnika jak również na wskaźniki charakteryzujące proces spalania, do których należy zaliczyć udział spalania zachodzącego według mechanizmu kinetycznego i dyfuzyjnego, szybkość wydzielania ciepła oraz czas trwania procesu spalania. Charakterystyki wydzielania względnej ilości ciepła wyznaczano w oparciu o analizę rzeczywistych uśrednionych ze 100 realizacji wykresów indyktorowych przy założeniu, że proces spalania zakończył się do chwili otwarcia zaworu wylotowego. Podczas badań silnik pracował według zewnętrznej charakterystyki prędkościowej. Badania przeprowadzono dla trzech kątów wyprzedzenia wtrysku paliwa 13, 17 i 21°OWK.

**Słowa kluczowe:** kąt wtrysku, silnik wysokoprężny, emisja, właściwości fizyczne i chemiczne paliwa.

